

AGRILED® 3 mini

Art.no. 1040384

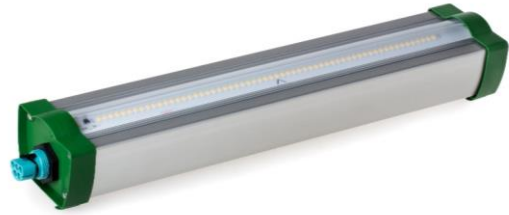
NL	ENG	FR	DE
Technische specificaties	Technical specifications	Spécification technique	Technische Spezifikationen

Date : 8-8-2023

version : 1.1



EN 60598-1:2015
EN 60598-2-1:1989 Luminaires
EN62471-5:2015 Photobiological safety
EMC tests EN55015:2019 + A11:2020 & EN61547:2009 standards
EN 61000-3-2:2019 & EN 61000-3-3:2013 + A1:2019



NL	ENG	FR	DE	
Netspanning	Mains voltage	Tension	Netzanschluss	220-240 VAC
Frequentie	Frequency	Fréquence	Frequenz	50 / 60 Hz
Stroom	Current	Courant	Strom	0,19 A
Inschakelpiek	Inrush current	Pic de courant	Einschalt strom	20A (25µsec at 50% Ipeak)
Vermogen	Power	Puissance	Leistung	43 W (Wall plugged) / 38 W (Led) +/- 5%
Arbeidsfactor	Power factor	Facteur de puissance	Wirkungsgrad	0,99 @ full load
Lumen	Lumen	Lumen	Lumen	5.705 lm (+/-5%)
Efficiëntie	Efficiency	Efficacité	Effizienz	133 lm/W (system) (+/- 5%)
Kleurtemperatuur	color temperature	Température de couleur	Farbtemperatur	4000 K
Kleurweergave	Color rendering index	rendu des couleurs	Farbwiedergabe	CRI 80
Dimbaar	Dimming function	Dimmable	Dimmbar	1-100 %
Dimsignaal	Dimming signal	électronique variable	Dimmsignal	DALI-2
SVM	SVM	SVM	SVM	< 0,4 SVM
Foto biologische veiligheid	Photo biological safety	sécurité	Photobiologische sicherheit	Risk group: RG1
IP/IK beschermingsgraad	IP/IK class	IP/IK Protection	IP/IK Schützungsgrad	IP65 / IK08
Temperatuur bereik	Temperature	Température	Temperatur	Ta - 20°C ~ + 35°C
Afmeting artikel	Unit dimensions	Taille article	Geräteabmessungen	L x B/W x H = 440 x 90 x 73 mm
Afmeting verpakking	Packing dimensions	Dimensions de l'emballage	Packmaß	L x B/W x H = 580 x 370 x 90 mm (4 pcs)
Gewicht artikel	Unit weight	Article poids	Gewicht artikel	1,1 kg
Gewicht incl. verpakking	Weight including packaging	Poids avec emballage	Gewicht mit verpackung	4,7 kg (4pcs)
Max. kabeldiameter	Maximum cable diameter	Diamètre maximum du câble	Maximale Leitungsdurchmesser	5p. Wieland connector /outside cable diameter 10 - 14mm / cross section wiring 0.75 - 4mm²
Levensduur	Lifetime	Durée de vie	Lebensdauer	100.000 (L80/B50)
Garantie (jaar)*	Warranty (year)*	Garantie (année)*	Garantie (Jahr)*	5
* zie garantie voorwaarden	* see warranty conditions	* Voir conditions de garantie	* Siehe Garantiebedingungen	Full warranty*



AGRI LIGHT®



BETTER LIGHT. BETTER LIFE

AGRILED® 3 mini**Art.no. 1040384**

Date : 8-8-2023

version : 1.1

Algemene opmerkingen

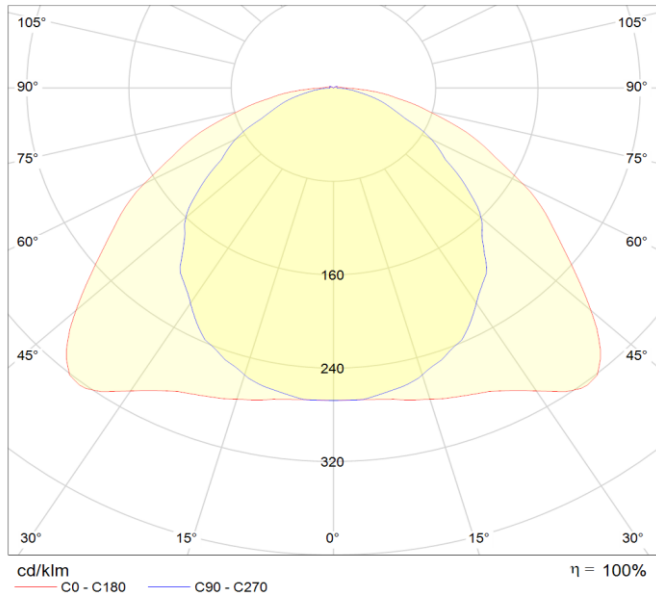
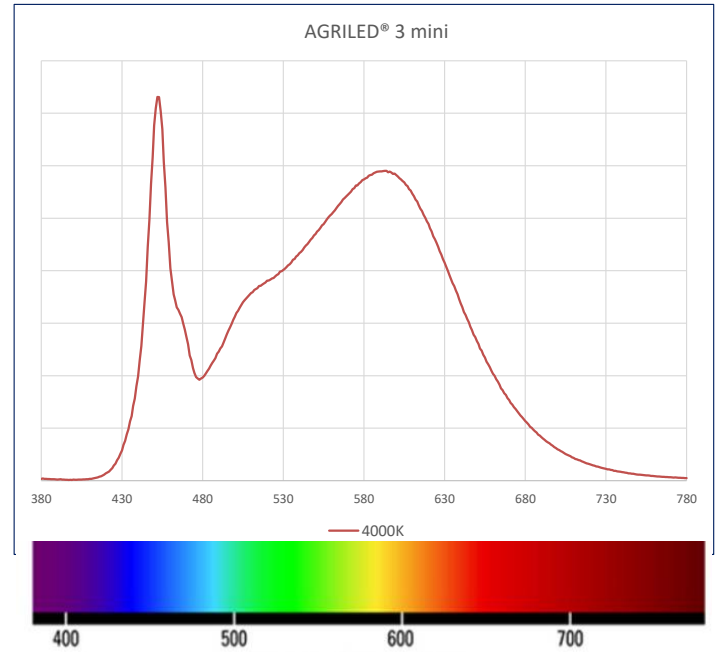
General comments

observations générales

Allgemeine Bemerkungen

Max amount of luminaires on circuit breaker

Fuse	B10	B16
Luminaires	35	55

Light distribution:**Light spectrum:**

AGRILIGHT®



BETTER LIGHT. BETTER LIFE