

## AGRILED® 3 mini

**Art.no. (Wieland connector Dali 1040384) / Dali cable 1041174 / On/Off cable 1041175**


NL	ENG	FR	DE
Technische specificaties	Technical specifications	Spécification technique	Technische Spezifikationen

Date : 26-1-2024

version : 2.1



EN 60598-1:2015  
 EN 60598-2-1:1989 Luminaires  
 EN62471-5:2015 Photobiological safety  
 EMC tests EN55015:2019 + A11:2020 & EN61547:2009 standards  
 EN 61000-3-2:2019 & EN 61000-3-3:2013 + A1:2019

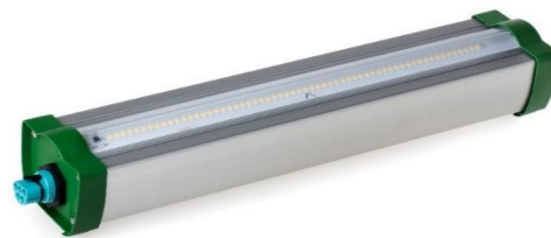

NL	ENG	FR	DE	Wieland connector	Dali cable	On/Off
Netspanning	Mains voltage	Tension	Netzanschluss	220-240 VAC		
Frequentie	Frequency	Fréquence	Frequenz	50 / 60 Hz		
Stroom	Current	Courant	Strom	0,19 A		
Inschakelpiek	Inrush current	Pic de courant	Einschalt strom	20A (25µsec at 50% Ipeak)	13,6A (220µsec at 50% Ipeak)	
Vermogen	Power	Puissance	Leistung	43 W (Wall plugged) / 37 W (Led) +/- 5%		
Arbeidsfactor	Power factor	Facteur de puissance	Wirkungsgrad	0,99 @ P max.	0,98 @ P max.	
Lumen	Lumen	Lumen	Lumen	6.115 lm (+/-5%)		
Efficiëntie	Efficiency	Efficacité	Effizienz	142 Lm/W (system) (+/- 5%)		
Kleurtemperatuur	color temperature	Température de couleur	Farbtemperatur	4000 K		
Kleurweergave	Color rendering index	rendu des couleurs	Farbwiedergabe	CRI 80		
Energieklasse	Energy class	Class énergétique	Energieklasse	C		
Dimbaar	Dimming function	Dimmable	Dimmbar	1-100 %	X	
Dimsignaal	Dimming signal	électronique variable	Dimmsignal	DALI-2	X	
SVM	SVM	SVM	SVM	< 0,4 SVM		
Pst	Pst	Pst	Pst	< 1 PstLM		
Foto biologische veiligheid	Photo biological safety	sécurité	Photobiologische sicherheit	Risk group: RG1		
IP/IK beschermingsgraad	IP/IK class	IP/IK Protection	IP/IK Schutzungsgrad	IP65 / IK08		
Temperatuur bereik	Temperature	Température	Temperatur	Ta - 20°C ~ + 35°C		
Afmeting artikel	Unit dimensions	Taille article	Geräteabmessungen	L x B/W x H = 440 x 90 x 73 mm		
Afmeting verpakking	Packing dimensions	Dimensions de l'emballage	Packmaß	L x B/W x H = 580 x 370 x 90 mm (4 pcs)		
Gewicht artikel	Unit weight	Article poids	Gewicht artikel	1,1 kg		
Gewicht incl. verpakking	Weight including packaging	Poids avec emballage	Gewicht mit verpackung	4,7 kg (4pcs)		
Kleur	Color	Couleur	Farbe	Aluminium blanc anodised body with green endcaps		
Max. kabeldiameter	Maximum cable diameter	Diamètre maximum du câble	Maximale Leitungsdurchmesser	5p. Wieland connector /outside cable diameter 10 - 14mm / cross section wiring 0.75 - 4mm <sup>2</sup>	including 0,75mtr 5G0,75mm <sup>2</sup>	including 0,75mtr 3G0,75mm <sup>2</sup>
Striplengte aansluiting	Stripping lenght connection	Longuer dénudage Raccordement	Abisolierlänge	8mm for Wieland 5p. connector	10mm (5 wires)	10mm (3 wires)
Levensduur	Lifetime	Durée de vie	Lebensdauer	100.000 (L80/B50)		
Garantie (jaar)*	Warranty (year)*	Garantie (année)*	Garantie (Jahr)*	5		
* zie garantie voorwaarden	* see warranty conditions	* Voir conditions de garantie	* Siehe Garantiebedingungen	Full warranty*		



**AGRILIGHT®**



BETTER LIGHT, BETTER LIFE

# AGRILED® 3 mini

Art.no. (Wieland connector Dali 1040384) / Dali cable 1041174 / On/Off cable 1041175

Date : 26-1-2024

version : 2.1

Algemene opmerkingen

General comments


observations générales

Allgemeine Bemerkungen


### Max amount of luminaires on circuit breaker

AGRILED® 3 mini connector & AGRILED® 3 mini Dali			AGRILED® 3 mini On/Off		
Fuse	B10	B16	B10	B16	C16
max. Luminaires	35	55	20	33	51

### Light distribution:

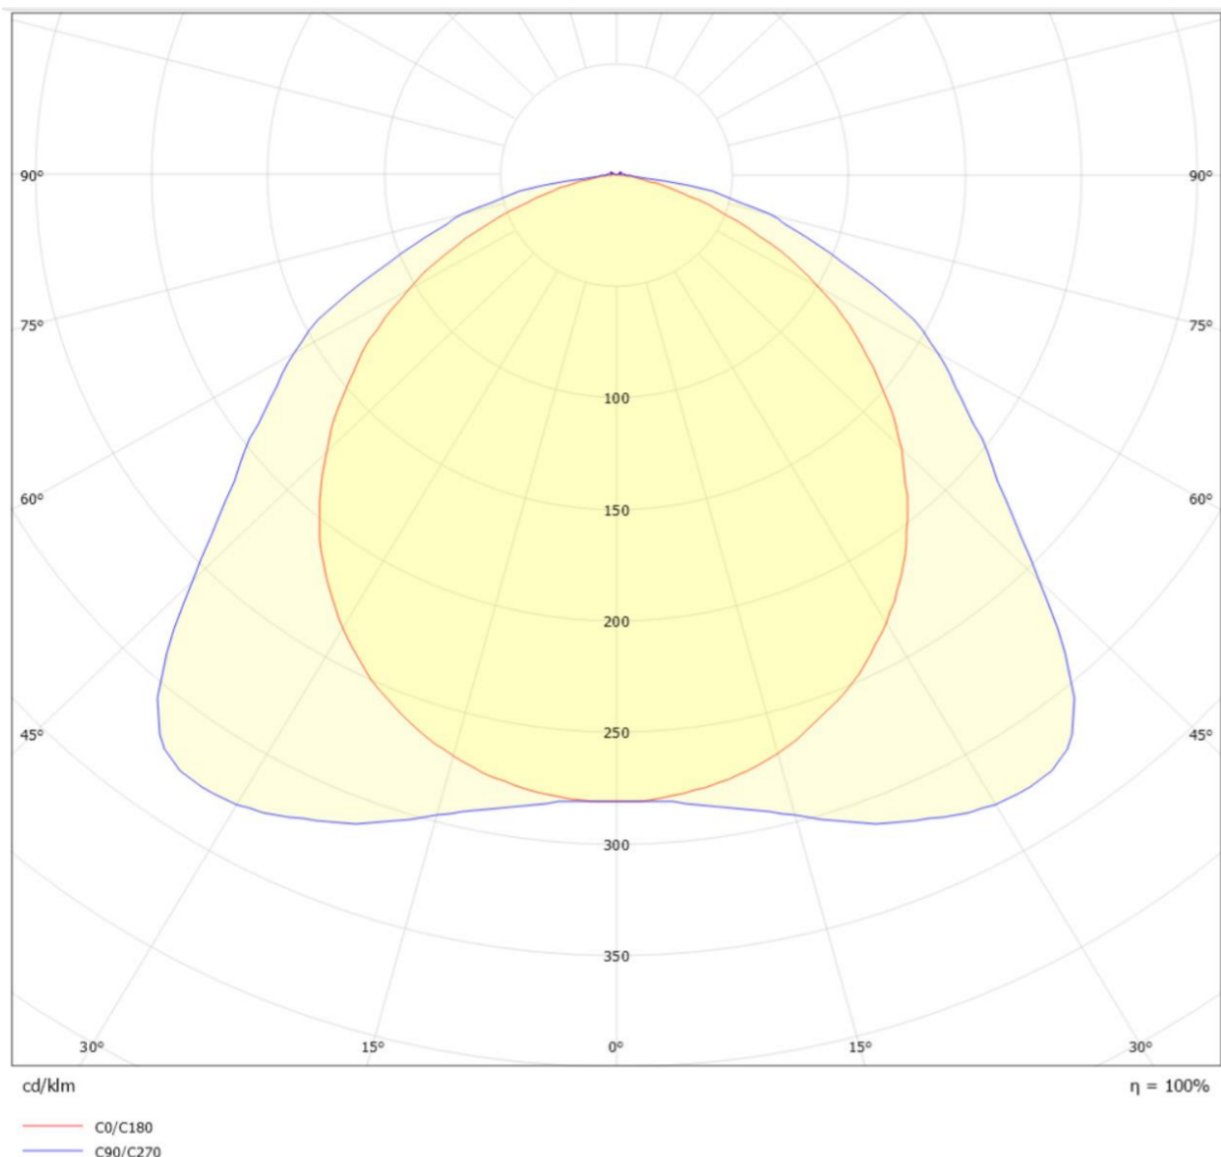

### Light spectrum 4000K:

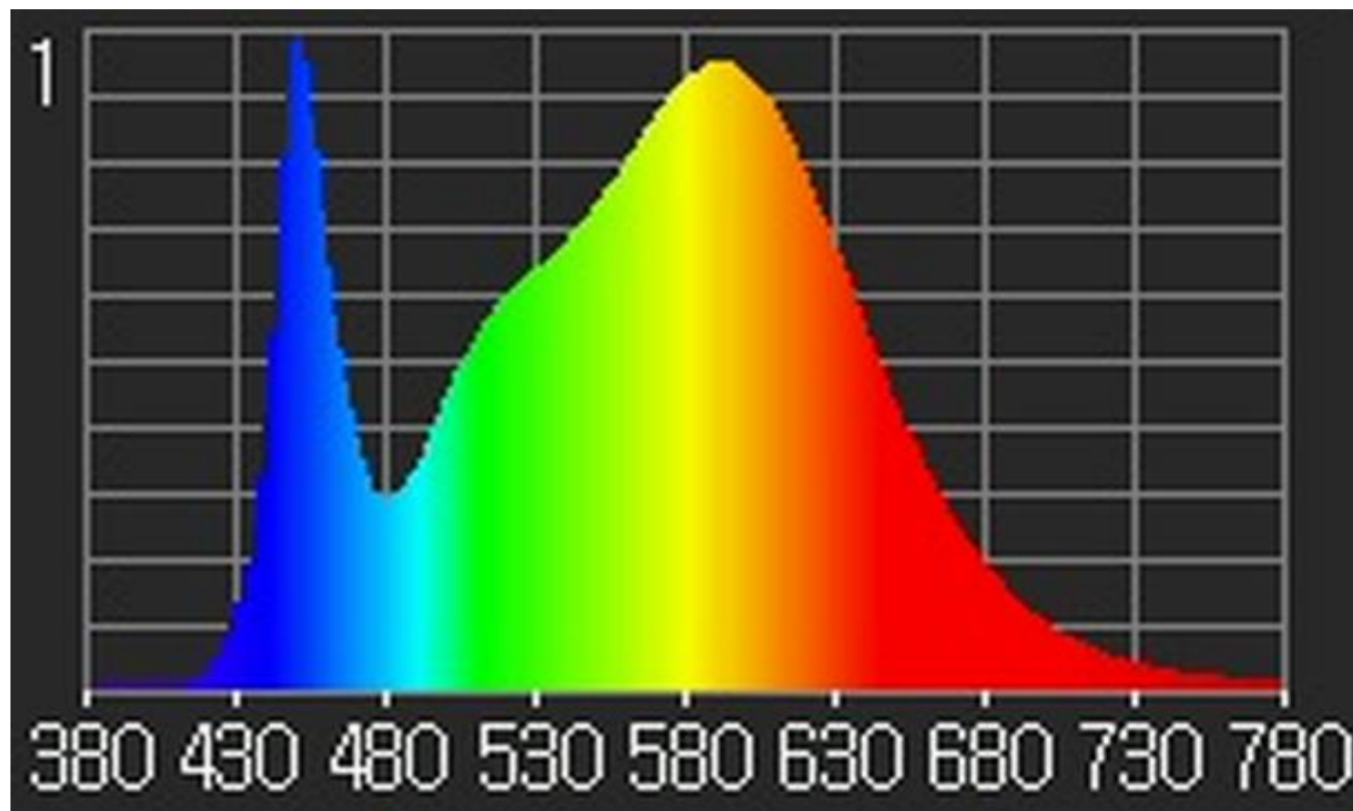

AGRILIGHT®



BETTER LIGHT, BETTER LIFE